

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 33 TOWNSHIP 16 RANGE 2

DATE: 7-26-01 6-21-06

PARTY CHIEF: Wilcoxon Kiste

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County 8-15-96

IN. S.P.C. E ZONE NAD '83

NAME: 16023302

N: 504785.9541(m)

E: 44285.0959(m)

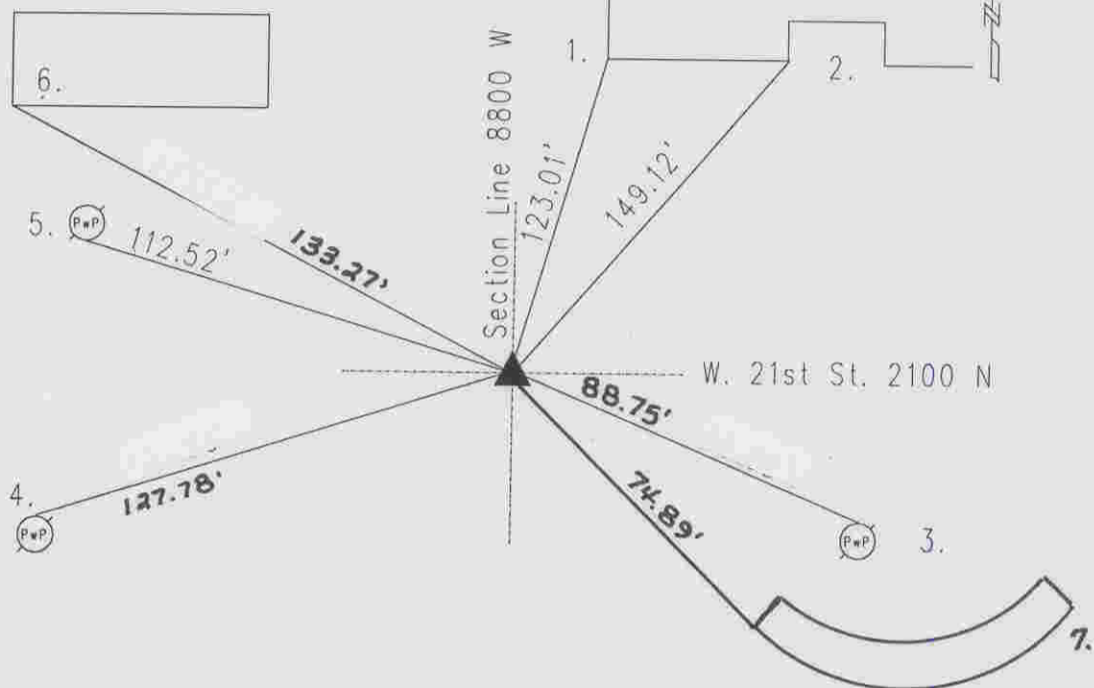

Original post set 1820 by Wm. B. Laughlin with witnesses: 48" elm S 25 W 3 links; 30" ash N 47 E 26 links per Marion County Atlas pg. 3. D.B. Hosbrook 8-17-1852 indicates no stone but witness: 22" oak S 11 3/4 W 29 1/2 links; and 10" walnut S 78 W 85 links per Wayne Township Legal Survey Book pg. 16. Miller 7-27-77 called a railroad spike. Wilcoxon 9-16-85 called the same. Wilcoxon 1-11-89 called the same. Wilcoxon 9-19-89 called a railroad spike. Wilcoxon 8-15-96 called the same. Excavated by Wilcoxon 7-26-01 and a railroad spike was found 4" down. No other points were found. Harrison set. Re-tied 7-26-01 by Wilcoxon.

16023302

REF.	DISTANCE	DESCRIPTION
1.	123.01'	SW corner of brick ADDRESS 8750
2.	149.12'	SE corner of brick ADDRESS 8750
3.	88.75'	Mag nail w/washer N. PwP#44-451-WB 10"up
4.	127.78'	PK nail N PwP#32-451 WB 16"up
5.	112.52'	PK nail S PwP#55-451 10"up
6.	133.27'	SW corner of brick ADDRESS 8806
7.	74.89'	SW corner of stone wall:Lake of the Pines